


SPECIFICATIONS

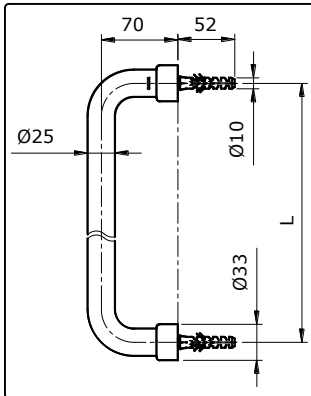

OPTIONAL LENGTH (L)

TYPE	LENGHT
TX3A1 Grab Bar (L=350 mm)	350 mm
TX3A2 Grab Bar (L=500 mm)	500 mm
TX3A3 Grab Bar (L=650 mm)	650 mm

MAINTENANCE

Always wipe chrome plated area with dry soft cloth, and sometimes wipe it with cloth soaked in mild soap.

ATTENTION

1. Don't use abrasive cleaning material such as; detergents containing hydrochloric acids, thinner, polishing powder, and nylon brush.
2. As the product model is constantly updated, the actual product may not look the same as it shown in the diagram, but the basic installation principles are the same.


INSTALLATION

- 1.
- 2.
- 3.

S060083R

R2

SPECIFICATIONS

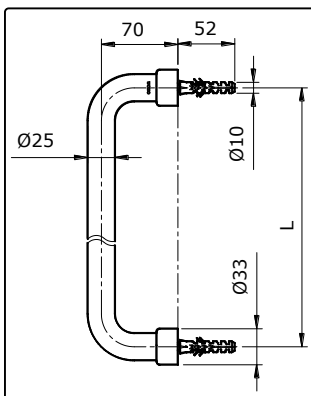

OPTIONAL LENGTH (L)

TYPE	LENGHT
TX3A1 Grab Bar (L=350 mm)	350 mm
TX3A2 Grab Bar (L=500 mm)	500 mm
TX3A3 Grab Bar (L=650 mm)	650 mm

MAINTENANCE

Always wipe chrome plated area with dry soft cloth, and sometimes wipe it with cloth soaked in mild soap.

ATTENTION

1. Don't use abrasive cleaning material such as; detergents containing hydrochloric acids, thinner, polishing powder, and nylon brush.
2. As the product model is constantly updated, the actual product may not look the same as it shown in the diagram, but the basic installation principles are the same.


INSTALLATION

- 1.
- 2.
- 3.

S060083R

R2

SPESIFIKASI

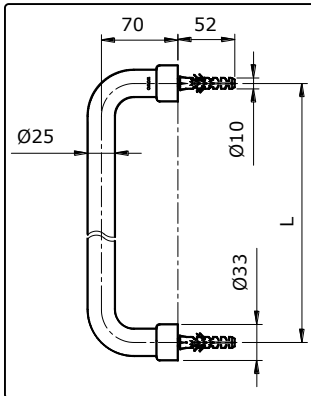

OPTIONAL LENGTH (L)

TYPE	LENGHT
TX3A1 Grab Bar (L=350 mm)	350 mm
TX3A2 Grab Bar (L=500 mm)	500 mm
TX3A3 Grab Bar (L=650 mm)	650 mm

PEMELIHARAAN

Selalu bersihkan area berlapis dengan kain lembut kering, dan sesekali bersihkan dengan kain yang direndam dalam sabun yang dicampur air.

PERHATIAN

1. Jangan gunakan bahan pembersih yang bersifat abrasif seperti deterjen yang mengandung asam klorida, timmer, bubuk polishing dan sikat nilon.
2. Karena model produk terus mengalami pembaharuan, aktual produk mungkin tidak sama dengan gambar, tapi prinsip dasar pemasangan adalah sama.


PEMASANGAN

- 1.
- 2.
- 3.

S060083R

R2

SPESIFIKASI

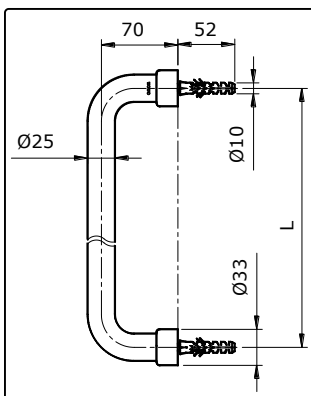

OPTIONAL LENGTH (L)

TYPE	LENGHT
TX3A1 Grab Bar (L=350 mm)	350 mm
TX3A2 Grab Bar (L=500 mm)	500 mm
TX3A3 Grab Bar (L=650 mm)	650 mm

PEMELIHARAAN

Selalu bersihkan area berlapis dengan kain lembut kering, dan sesekali bersihkan dengan kain yang direndam dalam sabun yang dicampur air.

PERHATIAN

1. Jangan gunakan bahan pembersih yang bersifat abrasif seperti deterjen yang mengandung asam klorida, timmer, bubuk polishing dan sikat nilon.
2. Karena model produk terus mengalami pembaharuan, aktual produk mungkin tidak sama dengan gambar, tapi prinsip dasar pemasangan adalah sama.

PEMASANGAN

- 1.
- 2.
- 3.

S060083R

R2