



Food, Food Machinery


Bando's F-Series resin conveyor belts have been a pioneer in the food industry. Antibacterial, antifungal and non-fray features are standard specifications. A wide selection is available as we have made product improvements and size reductions to reduce environmental impact and respond to changes in work environments. SUNLINE Belts meet various demands - from standard operations to specialty applications.

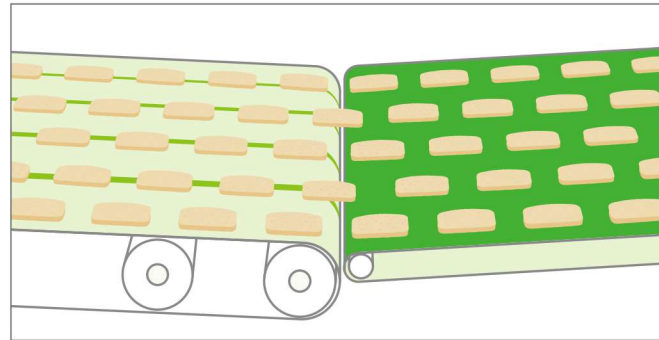


【 Small pulley and knife edge applications 】

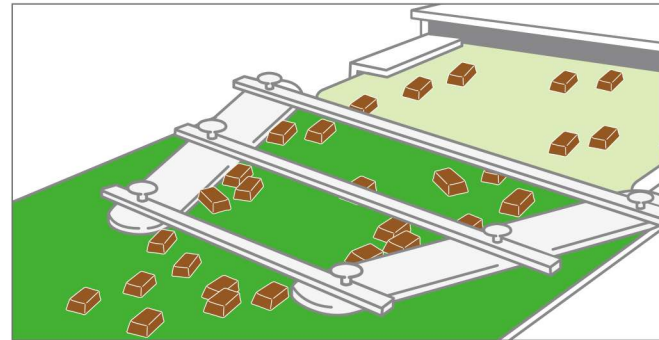


【 Less sticky 】

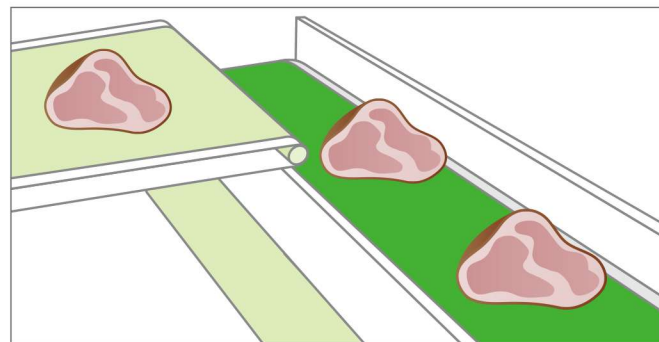


【 Long service life, even in applications requiring frequent cleaning or sterilization 】

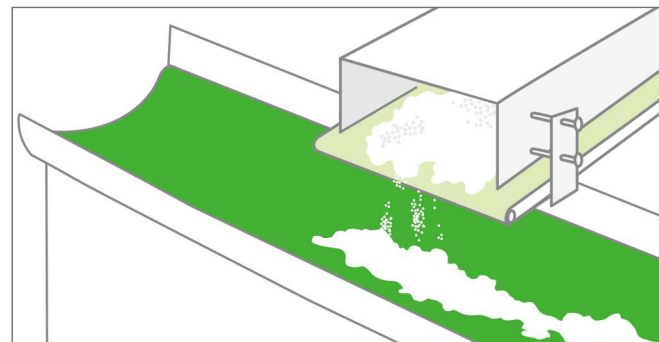


【 Trough-shaped conveyance for powder or bulk materials 】

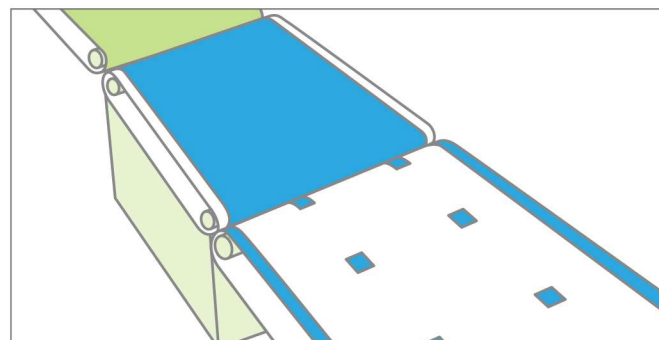


【 Available in blue to easily detect foreign object inclusion 】

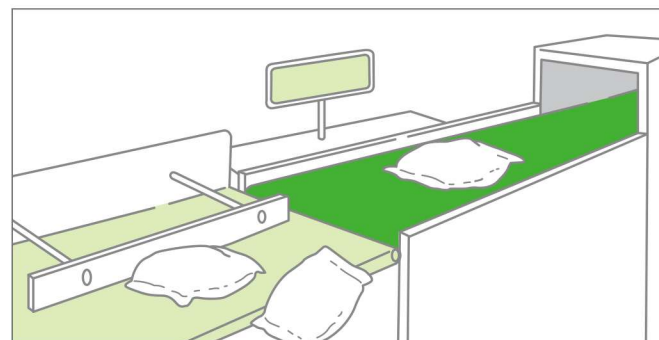

【 High precision seamless belts for scales 】

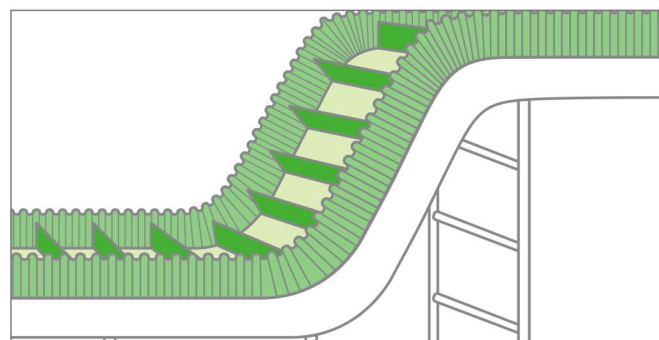

【 Inclined conveyance in narrow spaces 】

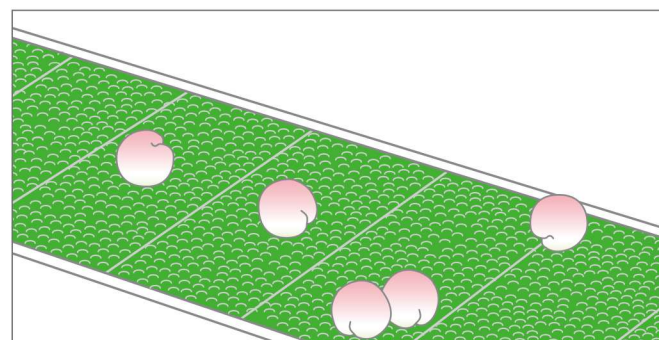


【 Prevents damage or rolling of fruits and vegetables 】


※Actual belt color may differ from those shown above.

Logistics, Logistic Equipment, Other


Reliable and effective conveyance is the most basic function of conveyor belts. Our belts offer high speed and low noise conveyance, with applications ranging from sorting and slide applications to inclined conveyance. We have belts resistant to heat, oil and chemicals for use in a variety of manufacturing processes, and we can provide processing service.

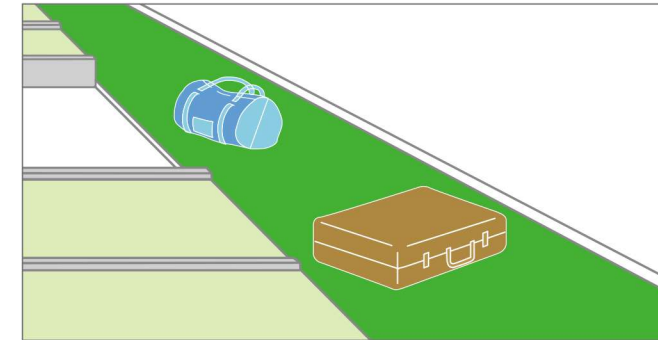


【 High speed conveyance for heavy baggage on airport conveyors 】

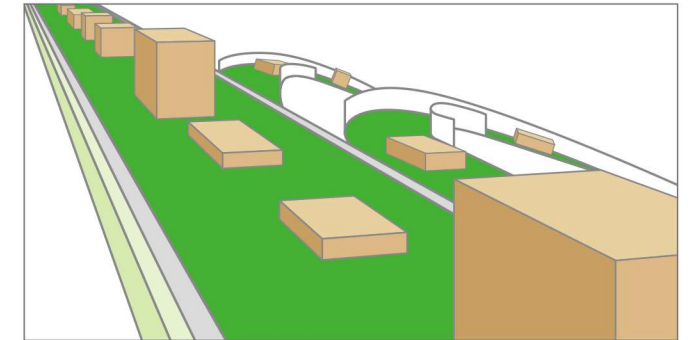


【 Slide conveyance for sorting lines 】

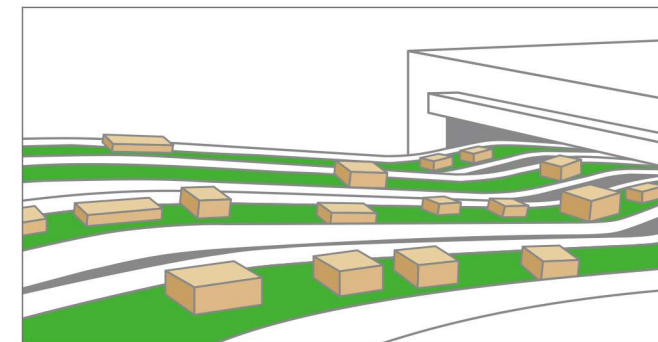


【 Inclined conveyance of boxes or bags 】

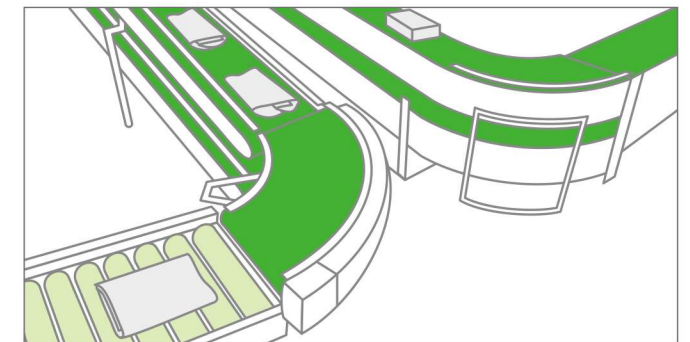


【 Flexible horizontal and vertical curves 】

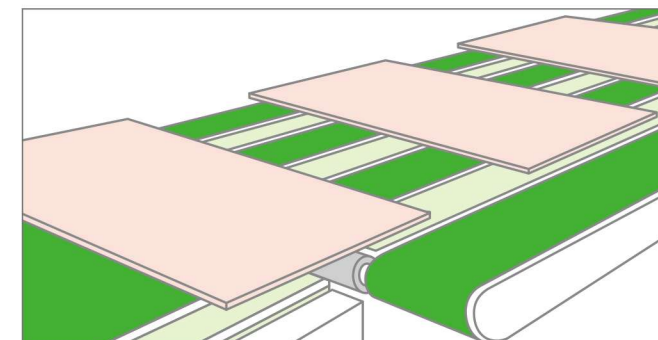

【 Multiple belts for large sized material such as plywood 】

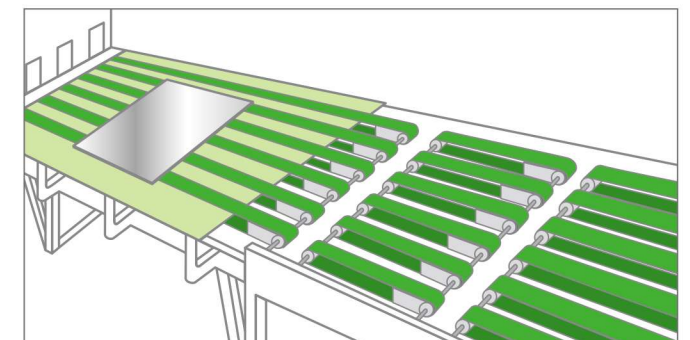


【 Post-press conveyance of steel plates and iron parts 】

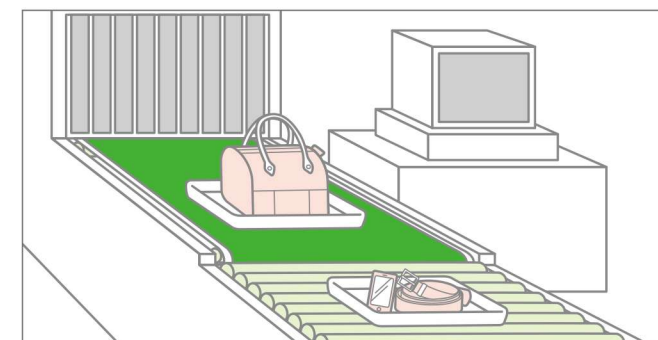



【 Inspection scanners 】

※Actual belt color may differ from those shown above.


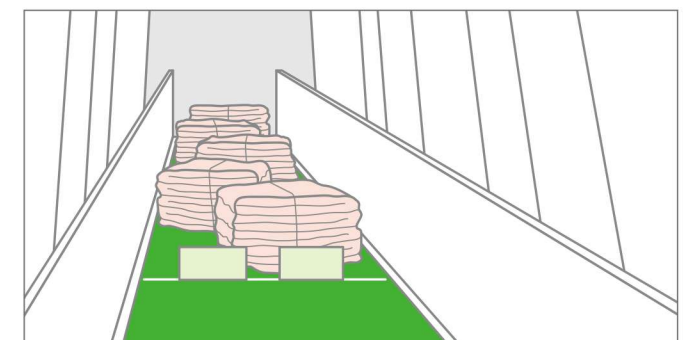


【 Cleats used in inclined conveyance 】



1. Conveyor length 2.0m or less

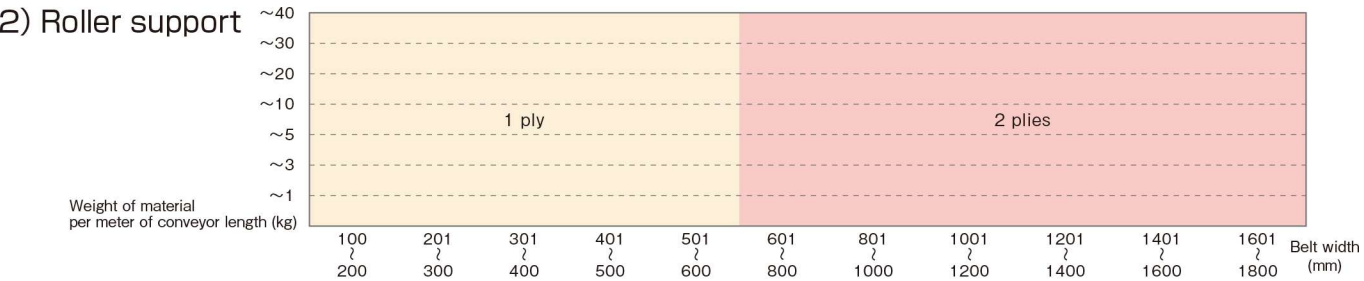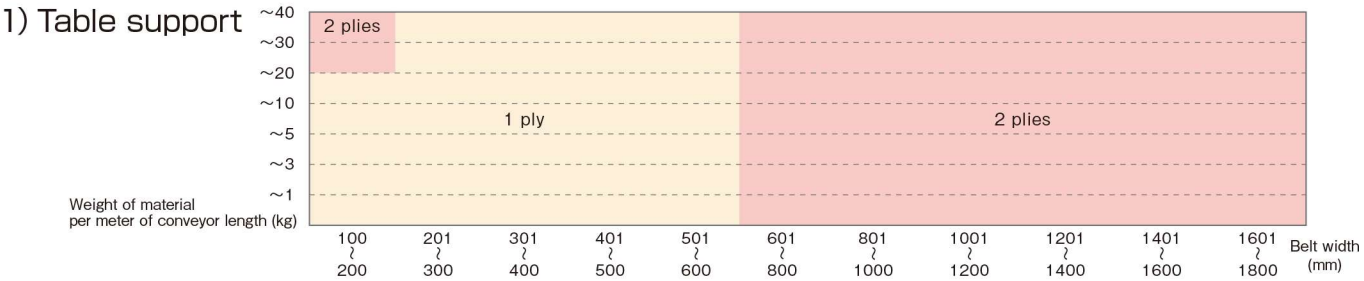



2. Conveyor length 2.1 ~ 5.0m

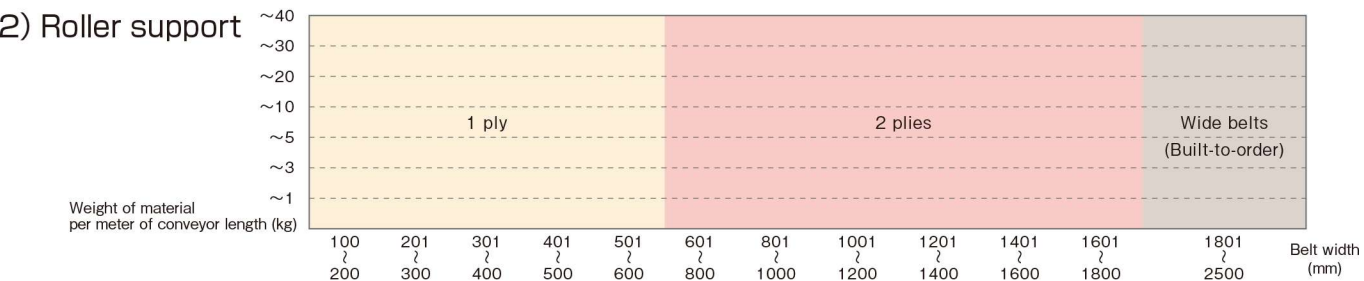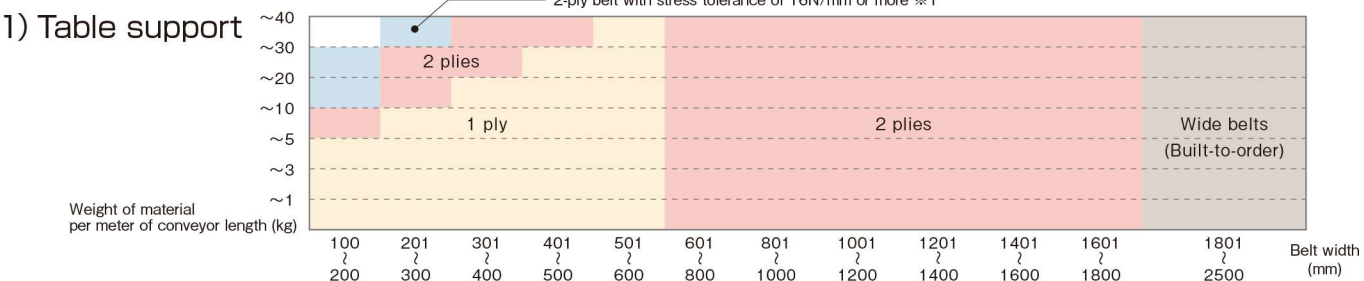



3. Conveyor length 5.1 ~ 10.0m

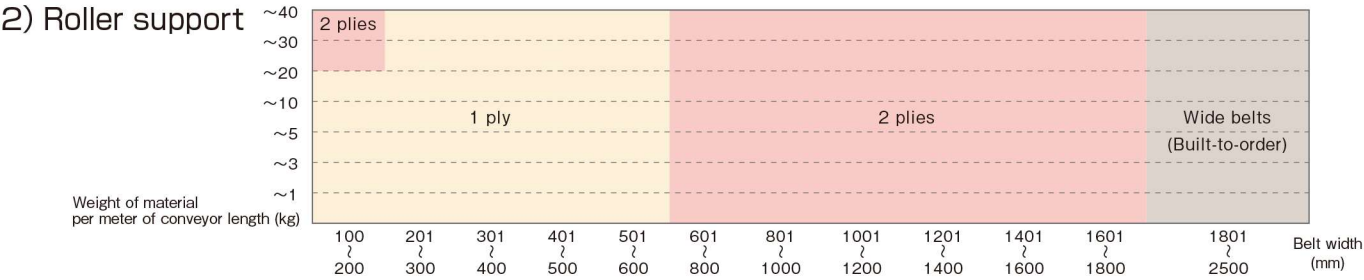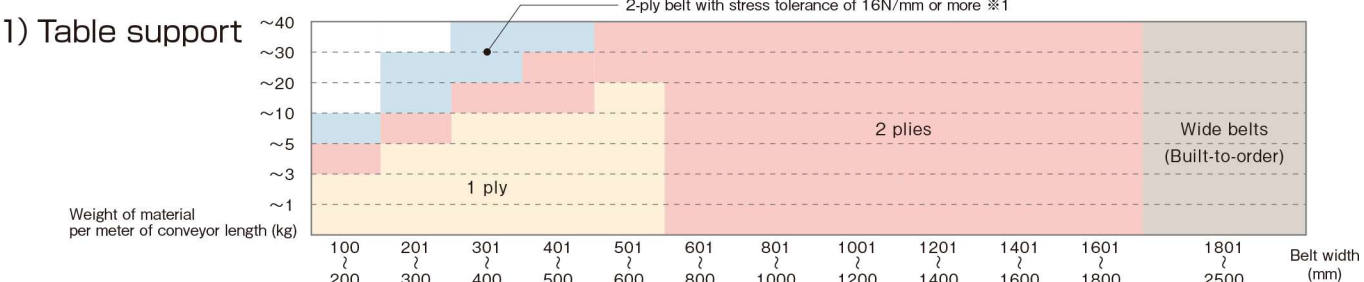

4. Conveyor length 10.1 ~ 15.0m

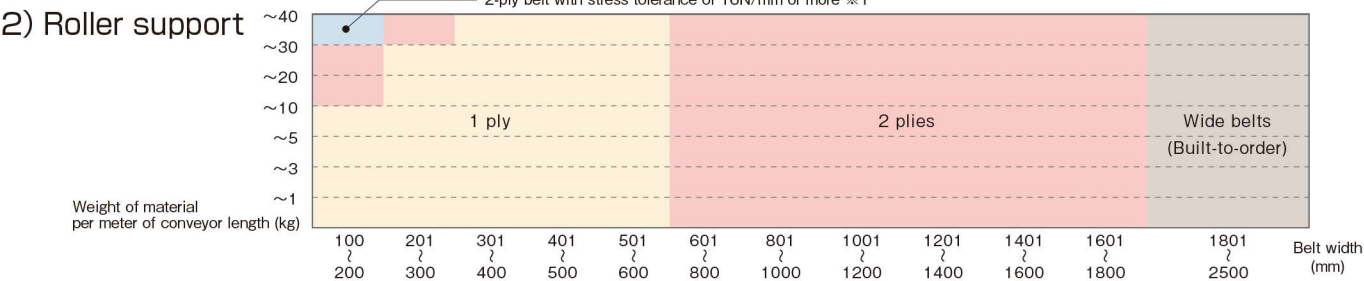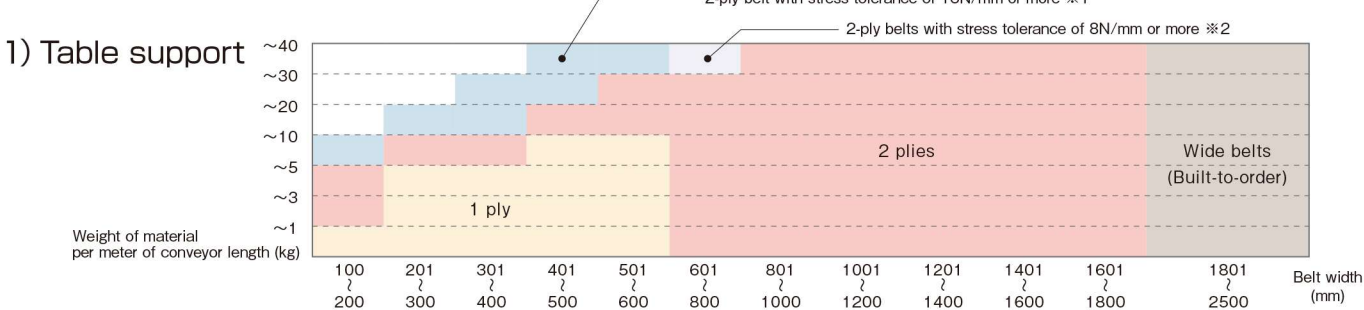

5. Conveyor length 15.1 ~ 20.0m or less

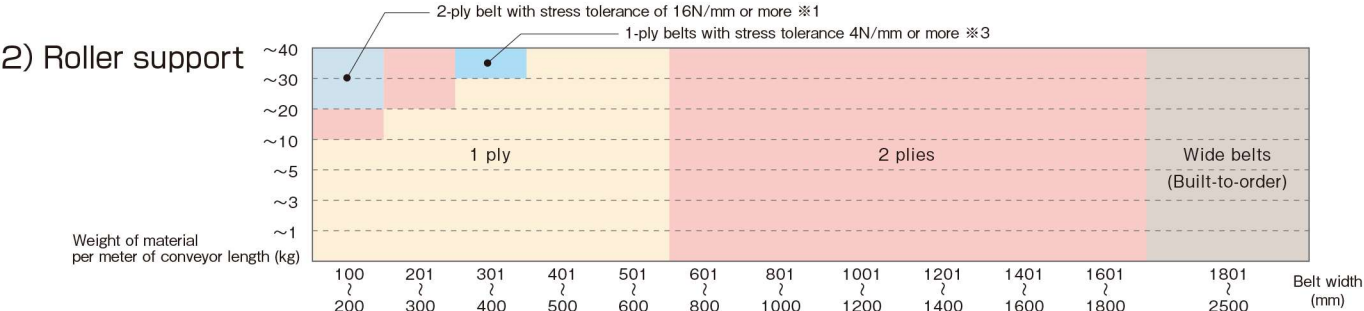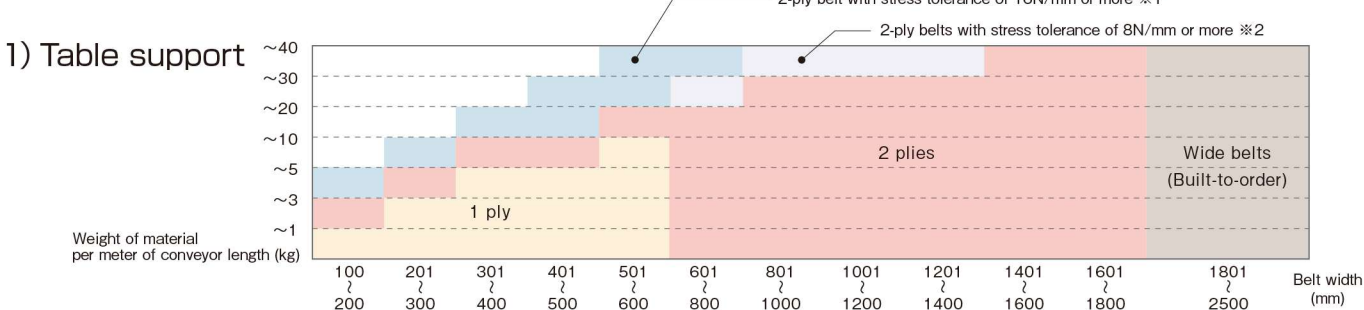

※1 2-ply belt with stress tolerance of 16N/mm or more : SL-S5425
※2 2-ply belts with stress tolerance of 8N/mm or more, except the following specifications :
SL-M2401N・SL-M5201N・SL-M5422・SL-S1239・SL-S6235・SL-S6400・SL-S6404・SL-S6933N・SL-S8231N・SL-S9200・SL-SY045・SL-SY456N・SL-S8432・SL-S7200
※3 1-ply belts with stress tolerance 4N/mm or more :
SL-M2309・SL-M4100・SL-M4300・SL-M5100・SL-M5302・SL-MC300・SL-S7300・SL-SY040・SL-SY533・SL-SY534・SL-M2100・SL-M2300・SL-S1235