


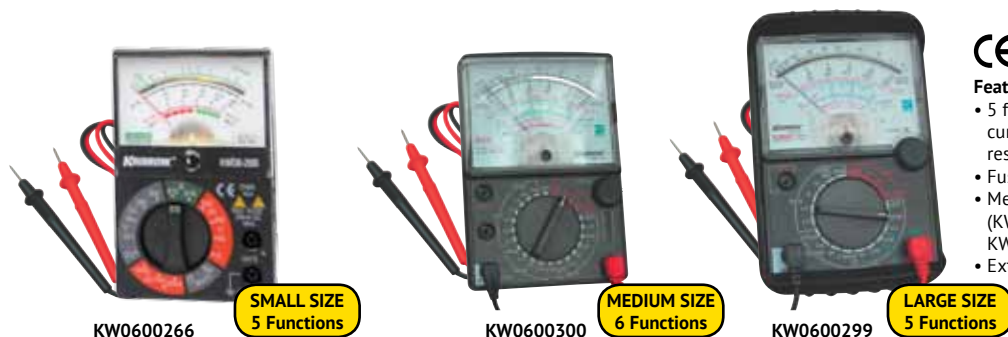

Features :

- 5 functions testing: DC voltage, AC voltage, DC current, resistance, and diode
- Fuse and diode protection
- Measuring range until 500VAC/VDC (KW0600266), 1000VAC/VDC (KW0600300 & KW0600299)
- Extra function: Transistor Check(KW0600300)

Article No.	KW0600266	KW0600300	KW0600299
Description	Analog Multimeter Small	Analog Multimeter Medium	Analog Multimeter Large
Specification			
DC Volts (V)	2.5, 10, 50, 250, 500	0.1, 0.5, 2.5, 10, 50, 250, 1000	
AC Volts (V)	10, 50, 250, 500	10, 50, 250, 1000	
DC Current (A)	500μ, 10μ, 250m	5μ, 2.5m, 25m, 250m, 2.5	5μ, 2.5μ, 25μ, 0.25
Resistance (Ω)	2K, 200K	2K, 20K, 200K, 2.000K, 20.000K	
Power Source(V)	1.5	1.5 x 2	
Dimension ((H x W x D) cm)	10 x 6.4 x 3.3	14.5 x 9.7 x 3.5	15 x 10 x 3.5
Weight (kg)	0.095	0.2	0.245

POCKET DIGITAL MULTIMETER

7 Functions



EN : 61326
EN : 61010-1
EN : 61010-02-03
EMC & LVD



Features:

- 4000 counts 7 functions including DCV, ACV, resistance, capacitance, frequency, continuity and diode test with data hold and relative functions.

Article No.	KW0600307	
Description	Pocket Digital Multimeter	
Specification		
Function	Max. Range	Accuracy (%rdg + digits)
DC Volts (V)	500	±(1.3% ± 3d)
AC Volts (V)	500	±(2.3% ± 5d)
Resistance (Ω)	40M	±(10.0% ± 5d)
Continuity	Audible Threshold <60Ω	
Diode Test (mA)	Test Current 1	
Capacitance (μF)	200	±(10% ± 15d)
Frequency (Mhz)	10	±(2% ± 5d)
Dimension ((H x W x D) cm)	11.3 x 6.1 x 1.3	
Weight (kg)	0.09	

POCKET DIGITAL MULTIMETER

10 Functions



UL 61010-1 v3



Accessories :

- Test Leads

Features:

- 4000 counts digital display with backlight
- Autoranging measurement
- Non Contact Voltage (NCV) AC
- Automatic power off for battery saving
- Equipped with Flashlight
- Equipped with Test lead holder
- Double molded plastic housing
- Double molded test lead
- 200 mA fused protection

Article No.	10206559	
Description	Digital Multimeter Pocket 600V with NCV	
Specification		
DC Voltage (V)	4/40/400/600	± (1.2% + 3d)
AC Voltage (V)	4/40/400/600	± (2.3% + 10d)
DC Current (A)	400μ/4000μ/40m/200m	± (2% + 8d)
AC Current (A)	400μ/4000μ/40m/200m	± (2.8% + 10d)
Resistance (Ω)	400/4k/400k/4M/40M	± (1.2% + 5d)
Capacitance (F)	51.2μ/512μ/5.12m/51.2m/100	± (5% + 25d)
Frequency (Hz)	9.999/99.99/999.9/9.999k	± (2% + 5d)
Duty Cycle (%)	0.5 to 99	
Continuity	Buzzer sound <100 ohm	
Diode Test	Test current 1mA, Open circuit voltage 1.5V	
Power Supply	2 x AAA 1.5V batteries	
Unit Dimension (HxWxD)	116 x 59 x 36 mm	
Weight (Nett/ Gross) (g)	145 / 250	

DIGITAL MULTIMETER COMPACT

7 Functions



EN : 61326
EN : 61010-1
EN : 61010-2-032
EN : 61010-2-033



Accessories :

- Test Leads
- Carrying Case

Features:

- 2000 counts digital display with backlight
- Non Contact Voltage (NCV) AC
- Data Hold function
- Automatic power off for battery saving
- Double molded plastic housing
- 200 mA fused protection

Article No.	10206570	
Description	Digital Multimeter Compact 600V with NCV	
Specification		
DC Voltage (V)	200m/2000m/20/200/600	± (0.8% + 3d)
AC Voltage (V)	200/600	± (1.2% + 10d)
DC Current (A)	2000μ/20m/200m/10m	± (1% + 2d)
Resistance (Ω)	200/2000/20k/200K/2000K	± (0.8% + 2d)
Battery Test	9V and 1.5V	± (1% + 2d)
Continuity	Buzzer sound <30 ohm	
Diode Test	Test current 1mA, Open circuit voltage 2.8V	
Power Supply	9V battery	
Unit Dimension (HxWxD)	150 x 70 x 48 mm	
Weight	255 g	
Power Supply	2 x AAA 1.5V batteries	
Unit Dimension (HxWxD)	116 x 59 x 36 mm	
Weight (Nett/ Gross) (g)	145 / 250	

DIGITAL MULTIMETER COMPACT PRO

10 Functions



EMC & LVD
EN : 61010-1
EN : 61010-2-031
EN : 61326



Features:

- IP65 waterproof & 2M droop-proof
- 4.0 Bluetooth interface with KRISBOW meter
- Digital display counts 4000
- Auto Range
- True RMS
- Auto Power Off
- Data Hold & MAX/MIN recording mode
- Flashlight & Backlit
- Heavy duty & compact size
- Full range protection, double molded plastic housing

Accessories :

Test Leads & Carrying Case



Article No.	10106732	
Description	Digital Multimeter Compact Pro	
Specifications		
DC Voltage (V)	400m/4/40/400/600	±(1.0%+3d)
AC Voltage (V)	400m/4/40/400/600	±(1.0%+5d)
DC Current (A)	400μ/4m/40m/400m/10	±(1.5%+3d)
AC Current (A)	400μ/4m/40m/400m/10	±(2.5%+5d)
Resistance (Ω)	400/4K/40K/400K/4M	±(1.5%+5d)
Capacitance (F)	40n/400n/4μ/40μ/400μ/4m	±(3.0%+5d)
Frequency (Hz)	9.999/99.99/999.9/9.999K/99.99K/500K	±(1.0%+5d)
Duty Cycle (%)	9.99%	± 1.2%
Diode Check	6V, open circuit 3.3V	
Continuity Test	Buzzer sound < 50Ω	
Analysis software	KRISBOW meter	
Power Supply	2x1.5V AAA battery	
Unit Dimension (cm)	12 x 6.7 x 5	
Weight (kg)	0.200	

AUTOMOTIVE MULTIMETER

13 Functions



EMC & LVD
EN : 61010-1
EN : 61010-02-03
EN : 61326

Features:

- 13 functions include DCV, ACV, DCA, ACA, resistance, RPM(Tach), dwell angle, duty cycle, frequency, temperature(°C/°F), continuity and diode test
- RPM measurement for automotive engines with 1 to 8 cylinders using the inductive pickup
- Autoranging with manual ranging override
- Large 3260 count LCD display with bar graph and function indication
- Data hold and range hold
- Fused current inputs and overload protection on all ranges
- Complete with rubber holster, test leads, type K temperature probe, pick up and 9V battery

Article No.	KW0600276	
Description	Automotive Multimeter	
Specification		
Function	Max. Range	Accuracy
DC Voltage (V)	326m, 3.26, 32.6, 326, 1000	±(0.5% ± 2d)
AC Voltage (V)	3.26, 32.6, 326, 750	±(1.2% ± 4d)
DC Current (A)	326μ, 3260μ, 32.6m, 326m, 10	±(1.2% ± 3d)
AV Current (A)	326μ, 3260μ, 32.6m, 326m, 10	±(1.5% ± 5d)
Resistance (Ω)	326, 3.26K, 32.6K, 326K, 3.26M, 32.6M	±(2.0% ± 4d)
RPM (Tach) (rpm)	600~320; 6000~12000 (x10)	±(2.0% ± 4d)
Dwell Angle	3CYL to 0-120.0°	
	4CYL to 0-902.0°	
	5CYL to 0-72.0°	
	6CYL to 0-60.0°	
	8CYL to 0-45.0°	±(2.0% ± 4d)
Duty Cycle	1.0%~90.0%	±(2.0% ± 5d)
Frequency (Hz)	320, 3200, 32K	±(1.5% ± 4d)
Temperature (°C/°F)	-20~320/-20~750	±(3.0% ± 2°C)
	-4~320/-4~1400	±(3.0% ± 3°F)
Diode Check	Test Current 0.6mA; Open Circuit Voltage 3.0V	
Continuity Check	Audible Threshold<20Ω	
Dimension ((H x W x D) cm)	18.9 x 9.1 x 3.15	
Weight (kg)	0.31	

DIGITAL MULTIMETER HEAVY DUTY PRO

11 Functions



EMC & LVD
EN : 61010-1
EN : 61010-2-031
EN : 61326



Features:

- IP67 Waterproof
- 4.0 Bluetooth interface with KRISBOW meter
- Display Count 6000
- Auto Range
- True RMS
- Auto Power Off
- LoZ: Low input Impedance to prevent gosh voltage
- Data Hold/Relative/MAX/MIN/AVG Mode
- AC+DC Mode
- Peak Value
- Analogue Bar Graph
- Backlit for LCD, Button, knob Switch & Flashlight
- Heavy duty & compact size
- Full range protection, double molded plastic housing

Accessories :

- Test Leads
- Temperature Probe
- Carrying Case

Article No.	10106731	
Description	Digital Multimeter Heavy Duty Pro	
Specifications		
DC Voltage (V)	600m/6/60/600/1000	±(0.8%+5d)
AC Voltage (V)	6/60/600/1000	±(1.0%+5d)
AC + DC Voltage [LoZ] (V)	6/60/600/1000	±(3.0%+30d)
DC Current (A)	600μ/6000μ/60m/600m/10	±(1.0%+3d)
AC Current (A)	600μ/6000μ/60m/600m/10	±(1.0%+3d)
Resistance (Ω)	600/6K/60K/600K/6M/60M	±(1.5%+5d)
Capacitance (F)	60n/600n/6μ/60μ/600μ/6000μ	±(3.0%+5d)
Frequency (Hz)	10 to 10K	±(1.0%+5d)
Duty Cycle (%)	20 to 80	±(1.2%+2d)
Temperature	-20 to 760°C	±(1.0%+5°C)
	-4 to 1400°F	±(1.0%+9°F)
Diode Check	Test current 1mA, open circuit voltage 3V	
Continuity Test	Buzzer sound < 30Ω	
Input Impedance for DCV	Around 10MΩ	
Low input Impedance	For DCV/ACV measurements >3kΩ @ 600V MAX.	
AC Bandwidth (Hz)	50 to 1000	
Analysis software	KRISBOW meter	
Power Supply	4x1.5V AAA battery	
Low Battery Indication	≤4.5V	
Unit Dimension (cm)	17 x 7.4 x 4.5	
Weight (ka)	0.400	