

Super light-weight & MultiusePutty




EG-P DUCT SEAL COMPOUND

To seal openings from air, water or dust.

Excel at various openings filling in indoor and outdoor.

CAUTION

This product is not fire retardant or fire proofed, cannot be used for the fire protection methods.

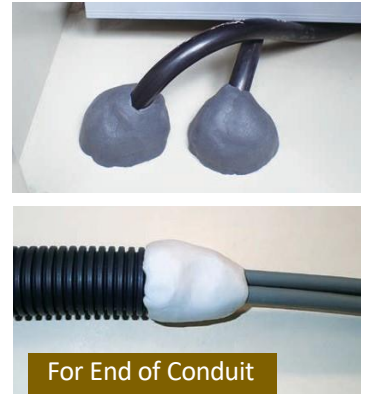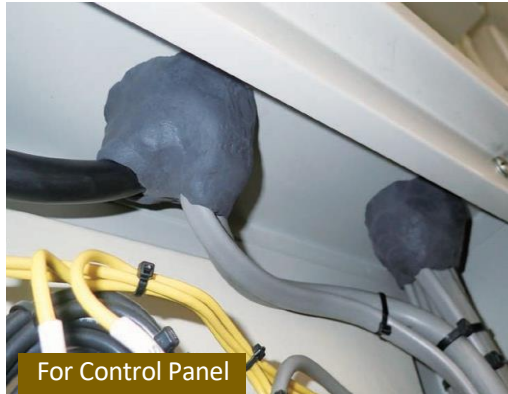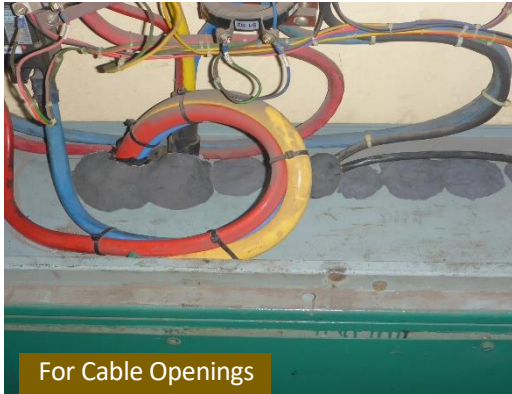

Excellent in water resistance and weather resistance.

Super lightweight and easy to install. "Easy Putty"

Excel at various holes filling in indoor and outdoor locations.

◆ Good Workability

Good workability with the **non-sticky** and **lightweight** putty. Easy to remove and re-install due to the non-curable type.

◆ Applicable to various places

Usable both in indoor and outdoor places for its **excellent water resistance** and **weather resistance**. Applicable to various places.

SUPER LIGHT WEIGHT PUTTY

It's a great deal. Why?

EG-P


When the Weight of putty = 250g



SUPER LIGHT Specific gravity = 1.0



The amount of putty = 250ml

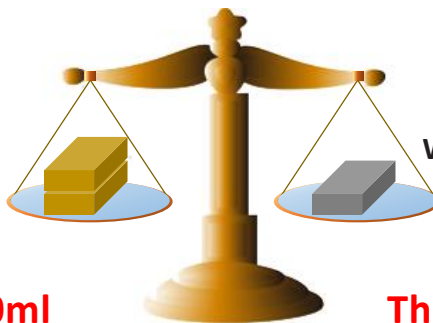

OTHER PUTTY

When the Weight of putty = 250g



Specific gravity = 2.0



The amount of putty = 125ml

USABLE AMOUNT WOULD BE **DOUBLE** ^{x2}

¿Think of those as almost the same price?

- ① Color: Gray
- ② Consistency: 65 (JIS A 5752)
- ③ Specific gravity: 1.0 (water displacement method)
- ④ Flame retardance: None
- ⑤ Insulation (Ordinarily $\geq 10^8 \Omega \text{ cm}$): 3.6×10^{12}
- ⑥ Heat conductivity (W/m · K): 0.35
- ⑦ Accelerated weathering resistance: No abnormalities after 600 hours of testing in Super UV Tester
- ⑧ Water resistance: No abnormalities after immersion in tap water (room temperature) for one month
- ⑨ Effects on cable sheathings: None
- ⑩ Effects on metals: None

Storage and use conditions

- (1) Avoid exposure to direct sunlight or high humidity. Store the product in a room at 40°C or less.
- (2) Do not use the product in areas or parts continuously immersed in water or in contact with oil.
- (3) Read the precautions printed on the product or the SDS, etc. for additional and detailed information.

Sales unit, Packaging

250g (250ml) in polyethylene bag

Carton: 1.25kg corrugated cardboard carton (250g in bag x 5)



For the fire protection methods... Fire Stop Putty-KP



Lightweight

1.0 of specific gravity.

Excellent fireproof performance

2hours fireproof performance has been certified.
(UL System No.C-BJ-3035)

Optimum for small openings

Suitable for circular openings up to 150mm in diameter.

Soft and easy to fill

Compatibly adheres to various building materials. Can be conveniently used for finishing work by sealing any parts.

FURUKAWA TECHNO MATERIAL CO., LTD.

5-1-8 Higashi-yawata, Hiratsuka-city, Kanagawa pref., 254-0016, JAPAN

URL: <http://www.furukawa-ftm.com/>

E-mail: ftm.bosai@furukawaelectric.com

FT-S-E20001A