



Essential SmartBright LED Downlight

DN027B G3 LED15/CW 15W 220-240 D175 RD

Essential SmartBright LED Downlight, 15 W, 1600 lm, 6500 K, Beam angle 110°, White

Essential SmartBright G2 LED Downlight is value for money product with high efficacy, good quality and reliability. It offers multiple configurations from 300lm to 2000lm output, to replace conventional downlight. It can be used for shopping mall, retail store, residential and office. It's an ideal product family to distribute in trade market.

Product data


General Information		Light source color	
Light source replaceable	No	Optic type	Beam angle 110°
Number of gear units	1 unit	Luminaire light beam spread	110°
Driver included	Yes	Operating and Electrical	
Lighting Technology	LED	Input Voltage	220 to 240 V
Glow-wire test	Temperature 650 °C, duration 30 s	Line Frequency	50 or 60 Hz
Flammability mark	For mounting on normally flammable surfaces	Input Frequency	50 or 60 Hz
Warranty period	3 years	Inrush current	4.35 A
EU RoHS compliant	Yes	Inrush time	0.1 ms
Light Technical		Power Consumption	15 W
Luminous Flux	1,600 lm	Power Factor (Fraction)	0.9
Correlated Color Temperature (Nom)	6500 K	Cable	Cable 0.2 m without plug
Luminous Efficacy (rated) (Nom)	106.00 lm/W	Number of products on MCB of 16 A type B 64	
Color rendering index (CRI)	80		

Essential SmartBright LED Downlight

Temperature	
Ambient temperature range	-20 to +40 °C
Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Constant light output	No
Mechanical and Housing	
Housing Material	Metal-Plastic
Reflector material	-
Optic material	Polycarbonate
Optical cover material	Polycarbonate
Fixation material	Steel
Housing Color	White
Optical cover finish	Matte
Overall length	200 mm
Overall width	200 mm
Overall height	45 mm
Overall diameter	200 mm
Dimensions (Height x Width x Depth)	45 x 200 x 200 mm
Approval and Application	
Ingress protection code	IP20/40 [Finger-protected, Emitting surface]
Mech. impact protection code	IK03 [0.3 J]
Protection class IEC	Safety class II


Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-10%
Initial chromaticity	(IEC6500K, 0.313, 0.337) < 5SDCM
Power consumption tolerance	+/-10%
Over Time Performance (IEC Compliant)	
Driver failure rate at 5000 h	0.012 %
Median useful life L70B50	30,000 hour(s)
Application Conditions	
Suitable for random switching	No
Product Data	
Order product name	DN027B G3 LED15/CW 15W 220-240 D175 RD
Full product name	DN027B G3 LED15/CW 15W 220-240 D175 RD
Full product code	871951434570600
Order code	929002674138
Material Nr. (12NC)	929002674138
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514345706
Numerator - Packs per outer box	24
EAN/UPC - Case	8719514345713

Dimensional drawing

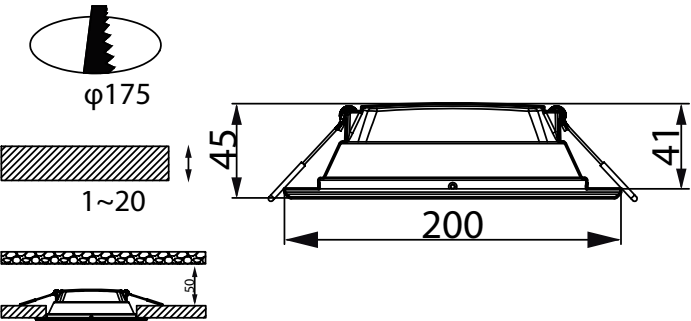


Essential SmartBright LED Downlight

Photometric data



Light Distribution Diagram - DN027B G3 LED15/CW 15W 220-240 D175 RD



General uniform lighting - DN027B G3 LED15/CW 15W 220-240 D175 RD

